


Brondell®

Jema Pull-Down Kitchen Faucet

Models: KF10-CH, KF10-SRS, KF10-MB

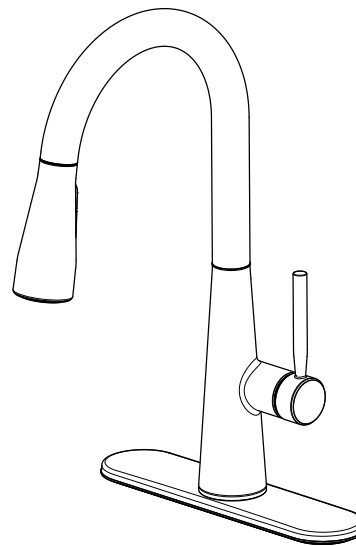

Features

Four Distinct Spray Modes:
RapidRinse, GentleClean, Aerated Stream,
and Pause Mode

High-Performance Nebia Sprays use only
0.8 Gallons per minute

Superior, EnduraCore Cartridge Rated for
1.5 Million Cycles

Kink-Free, Glide-Back Hose Retraction
and Docking

Accelerate Installation System with Quick-
Connect Components

Sprayhead Ball Joint and 360° Swivel Neck

Ergonomic Sprayhead with Easy-Clean,
Silicone Nozzle Ring

For use with 1, 2, and 3-hole sinks;
deck plate included

Fits countertops up to 2" thick when using
deck plate, 2.36" Without deck plate

Warranty

Limited lifetime warranty

Complies with Codes/Standards

Plumbing Certifications:
ASME A112.18.1/CSA B125.1, ASME
A112.18.16/CSA B125.16, ANSI/NSF 61

Other Certifications:
cUPC, ADA, AB1953, NSF61, Green, DOE,
CEC, COM



Technical Specifications

Dimensions with Deck Plate (W X D x H)	10.6" x 10.6" x 17.2" (26.92 cm x 26.92 cm x 43.69 cm)
Dimensions without Deck Plate (W X D x H)	4.1" x 10.3" x 16.8" (10.41 cm x 26.16 cm x 42.67 cm)
Spout Height with Deck Plate	8.8" (22.35 cm)
Spout Height without Deck Plate	8.5" (21.59 cm)
Spout Reach	8.4" (21.34 cm)
Weight with Deck Plate	4.01 lbs (1.82 kgs)
Weight without Deck Plate	3.77 lbs (1.71 kgs)

Product Specifications

Min/Max Operating Pressure	30 psi–80 psi
Rated Service Flow	1.5 gpm @ 60 psi
Faucet Flow Rate Aerated Spray	1.5 gpm
RapidRinse Spray Flow Rate	0.66 gpm
GentleClean Spray Flow Rate	0.79 gpm
External Faucet Material	Metal and ABS

NOTE: The specifications listed above are subject to
change without prior notice for reasons of improving
the product performance.

For questions and additional resources, contact:

Brondell Customer Support 1-888-542-3355

www.brondell.com/support

Brondell, Inc. PO Box 470085 San Francisco, CA 94147 | brondell.com

Installation and Accessories	
Installation Type	Deck Mount
Specification	1-3 Hole
Pull Down Spray Hose Length and Materials	67" Nylon Braided Hose
Inlet Hose Fittings	3/8" Compression Fit
Outlet Hose Fittings	5/16"-24 UNF-2A
Cartridge	25 mm Ceramic Disc
Cartridge Lifetime Cycles	1.5 Million Rotations
Sprayhead Rotation	360°
Handle Hot/Cold Arc	100°
Counterweight	450 g

